

Industrial Motors
Commercial &
Appliance Motors
Automation
Digital &
Systems
Energy
Transmission &
Distribution
Coatings

CFW503 - VARIABLE SPEED DRIVE

High performance
and **reliability** to
improve your
production process



Driving efficiency and sustainability



S U M M A R Y

Introduction	04
Simplified programming and operation	06
Flexibility and performance	07
Connectivity	08
Features	09
Applications	10
Coding	11
Specification	12
Accessories	14
Dimensions and weights	16
Standards	17
Technical specifications	18
Block diagram of IP20	19

04

06

07

08

09

10

11

12

14

16

17

18

19





WEG

WEG

LOC 14000
~ RUN 8 16

BACK STOP
ENTER MENU

LOC RUN STOP JOG

CFW503
VECTOR CONVERTER

LOC 14000
~ RUN 8 16

BACK STOP
ENTER MENU

LOC RUN STOP JOG

WEG CFW503
VECTOR CONVERTER

LOC 14000
~ RUN 8 16

BACK STOP
ENTER MENU

LOC RUN STOP JOG

WEG CFW503
VECTOR CONVERTER

LOC 14000
~ RUN 8 16

BACK STOP
ENTER MENU

LOC RUN STOP JOG

WEG CFW503
VECTOR CONVERTER

LOC 14000
~ RUN 8 16

BACK STOP
ENTER MENU

LOC RUN STOP JOG

WEG CFW503
VECTOR CONVERTER

WARNING
ATTENTION
DANGER

REMOVE TERMINAL COVER
BEFORE WORKING ON THE
CIRCUITRY. ALWAYS
DISCONNECT THE
POWER SUPPLY TO THE
UNIT BEFORE WORKING
ON THE CIRCUITRY.
DO NOT TOUCH THE
CIRCUITRY WHEN THE
UNIT IS POWERED ON.
DO NOT TOUCH THE
CIRCUITRY WHEN THE
UNIT IS POWERED ON.

WARNING
ATTENTION
DANGER

REMOVE TERMINAL COVER
BEFORE WORKING ON THE
CIRCUITRY. ALWAYS
DISCONNECT THE
POWER SUPPLY TO THE
UNIT BEFORE WORKING
ON THE CIRCUITRY.
DO NOT TOUCH THE
CIRCUITRY WHEN THE
UNIT IS POWERED ON.
DO NOT TOUCH THE
CIRCUITRY WHEN THE
UNIT IS POWERED ON.

CFW503

Machinery Drive

Endless possibilities

With modern design, the variable speed drive CFW503 is a **high performance** VSD for applications that require speed and torque control of three-phase induction motors. The equipment has **sensorless vector control, closed loop vector control or scalar V/F**. It also has SoftPLC, which adds PLC (Programmable Logic Controller) functions - making easier to comply the machine, which adds dedicated functions for pumping systems and selectable plug-in modules, that **provide a flexible and optimized solution** for any application.



High performance

Wide power range and high overload capacity

High performance control methods



Flexible

Connectivity

Advanced resources and functions

Assembly options



Innovative

SoftPLC - built-in PLC functionalities

Free programming softwares



Reliable

WEG Quality

Protection against ground fault, short circuit, over temperature and others

Internal RFI filter¹⁾ to reduce high-frequency electromagnetic interference

Note: 1) Under development.



Models from 1.0 to 211 A (0.25 kW / 0.33 HP to 132 kW / 175 HP)
at supply voltages 380-480

V/f scalar control, VVW control, vector control with sensor and
sensorless and permanent magnet motor control: VVW PM

Allows the CFW503 to be used in a large variety of applications,
improving their overall performance

USB and Fieldbus communication modules for the most used
industrial networks, like CANopen, DeviceNet, Profibus-DP,
EtherNet/IP, PROFINET IO or Modbus-RTU

Full integration with process network

The VSD, motor and application can work in an interactive way,
because it is possible to make customized logic and applications

WPS softwares available at www.weg.net

Ideal for machinery manufacturer

100% of the VSDs are tested at the factory
under full load and maximum temperature

High reliability

Conformal coating (tropicalization) as standard, class 3C2
according to IEC 60721-3-3 and 3C3 as an option, to protect
against corrosive gases in harsh environments

It prevents damage to the inverter which can be caused
by adverse situations, normally external factors

VSD lifetime is extended


Certifications



Simplified programming and operation

Operating interface (HMI)

- Monitoring, setting of all parameters as well as commands
- Up to three parameters indication on the display, according to user selection
- Oriented start-up and grouped parameters
- Mandarin version available

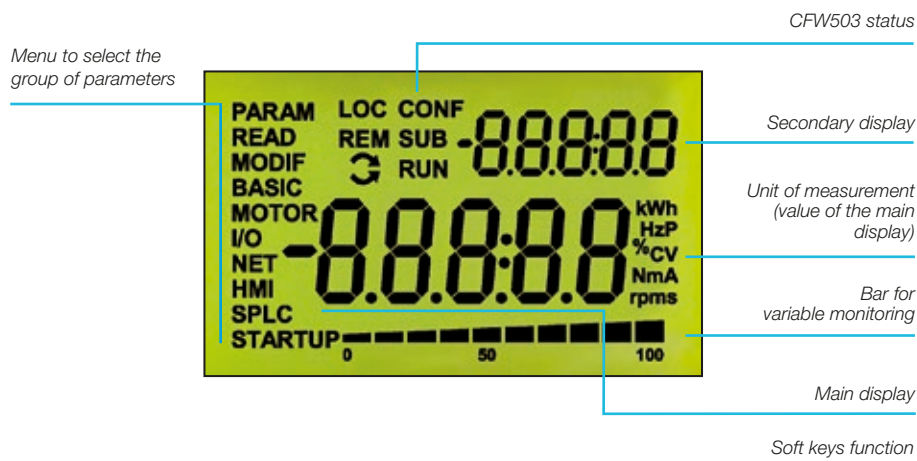

Note: the operating interface (HMI) of the CFW503 is not removable. For remote operation of the HMI, use the CFW500-HMIR accessory, according to the accessory table on page 21.

Remote operating interface (HMI)

Solutions for machine consoles and panels.



Accessory
IHM-01

Interface tools

- Graphic display with backlight
- Soft keys for easy operation
- Real time clock (RTC)
- Language selection
- Remote keypad

Flexibility and performance

The CFW503 has a modern design and it can be selected according to the application requirements, providing flexibility with excellent performance. The VSD gives the user the possibility to choose the plug-in module that best fits his application, or to use the standard version, that comes with the CFW500-IOS plug-in module. All plug-in modules comes with one RS485 port as standard. The installation of the CFW503 is simple and its configuration and operation is intuitive with the navigation menus of the operating interface (HMI) with built-in LCD display. By using the flash memory module, it is possible to download the existing setting from one CFW503 to other units without powering them up.



Conformal coating

Improved 3C2 class of coating on the internal circuits of all versions and extra 3C3 class coating (optional) according to IEC 60721-3-3 ensures improved protection in environments with corrosive chemicals.



Flash memory module

(CFW500- MMF accessory)

Download/upload the settings to other CFW503 units without the need to power them up.

Plug-in modules

Selectable according to the application.



Easily removable fan

The quick change system ensures simple and fast fan maintenance.



SoftPLC

It is a software resource added to the CFW503 which allows the user to implement and debug logic projects equivalent to a small PLC (Programmable Logic Controller), customizing and integrating the CFW503 to the application. The free WPS programming software is available at: www.weg.net.

Connectivity




Remote operating interface
(IHM-01 accessory)

Easy operation and view



Free at www.weg.net

WPS software

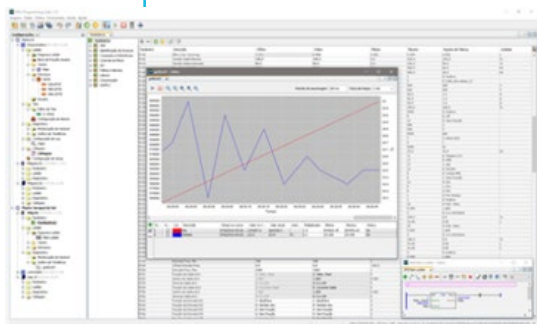

USB Connection
(CFW500-CUSB accessory)

The CFW503 can be connected to the main fast industrial Fieldbus communication networks, with protocols used worldwide such as CANopen, Profibus-DP, DeviceNet, PROFINET IO, EtherNet/IP and Modbus-TCP, according to the plug-in module selected.


In addition, all plug-in modules come with serial interface RS485 Modbus-RTU built-in.

I/O expansion:
IOS (standard, included in the version with plug-in), IOD, IOAD, IOR

Functionality expansion:
Incremental encoder
USB


Fieldbus communication protocols:
CANopen
DeviceNet
RS232
RS485
Profibus-DP
EtherNet/IP
Modbus-TCP
PROFINET IO
BACnet
SymbiNet

Selectable
plug-in
modules

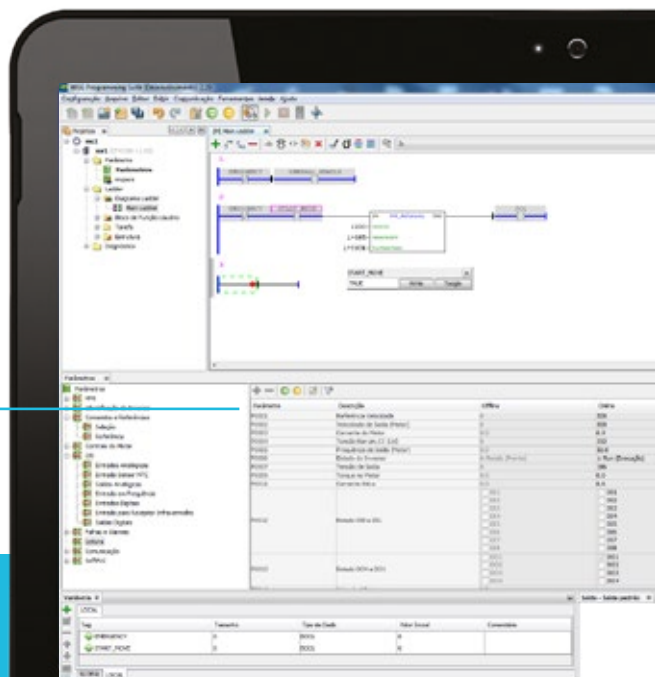


Features

- Special engineering units (rpm, °C, Nm, mA, %, kW, kWh, among others)
- Password to protect the parameters
- Backup of all parameters (via SuperDrive G2 software, or plug-in memory MMF)
- Possibility to save up to two different settings on the memory of the CFW503
- Setting of the switching frequency according to the application requirements
- Speed reference via electronic potentiometer
- Multispeed with up to eight programmable speeds
- Slip compensation
- Manual or automatic torque boost (V/F scalar mode) or self-adjustment (VWV and vector modes)
- Fire mode
- Permanent magnet motor control: VWV PM
- Acceleration/deceleration ramps
- "S" type ramp
- DC braking
- Internal dynamic braking (except frame size A)
- PID controller to control processes in closed loop
- Flying start / Ride-through
- Sleep mode
- Skip frequencies or frequency ranges function adjustable
- Overload and overtemperature protection
- Overcurrent protection
- DC link voltage supervision
- Fault log

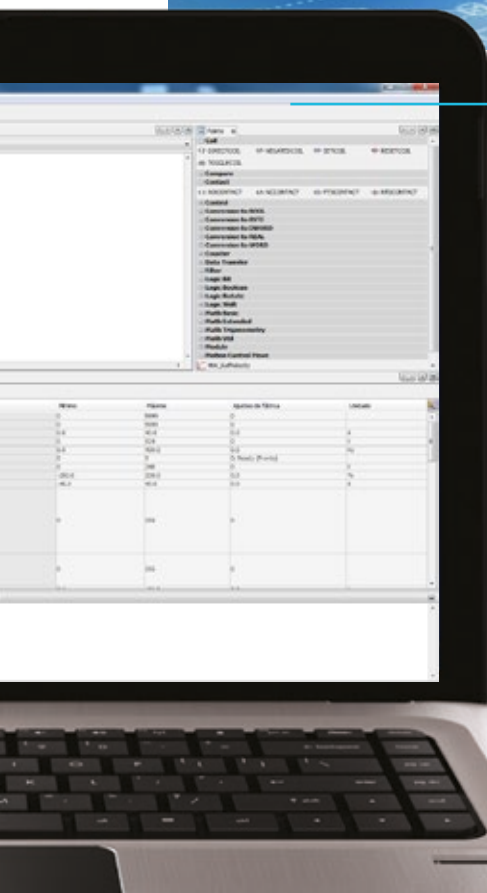

Easy and intuitive environment

Free at www.weg.net

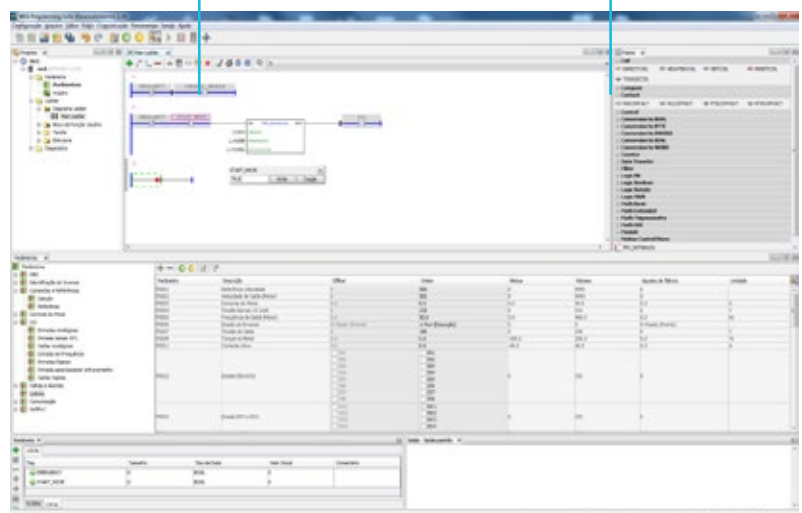

Applications



Extruders



Conveyor belts



Roller tables



Fans / exhausters



Centrifugal pumps



Granulators / palletizers



Cutting and welding machines




Dryers and rotary ovens



Process dosing pumps



Stirrers / mixers

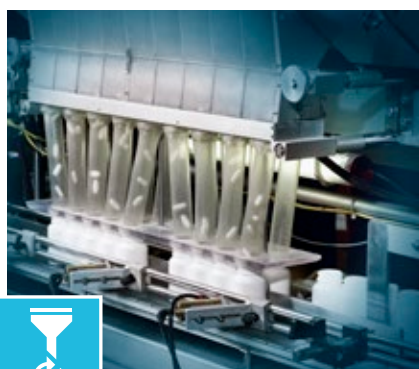

Rotary filters



Winding machines /
uncoiling machines

Coding¹⁾

1	CFW503	2	A	3	02P6	4	T	5	4	6	NB	7	20	8	C2	9	---	10	---
---	--------	---	---	---	------	---	---	---	---	---	----	---	----	---	----	---	-----	----	-----

1 - CFW503 variable speed drive**2 - Size of the CFW503, according to table 1 below****3 - Rated output current, according to table 1 below**

Power supply	Three-phase (T)
	380-480 V _{AC}
Voltage	01P0 = 1.0 A
	01P6 = 1.6 A
	02P6 = 2.6 A
	04P3 = 4.3 A
	06P1 = 6.1 A
	02P6 = 2.6 A
	04P3 = 4.3 A
	06P5 = 6.5 A
	10P0 = 10.0 A
	14P0 = 14.0 A
	16P0 = 16.0 A
	24P0 = 24.0 A
	31P0 = 31.0 A
	39P0 = 39.0 A
	49P0 = 49.0 A
	77P0 = 77.0 A
	88P0 = 88.0 A
	0105 = 105 A
	0142 = 142 A
	0180 = 180 A
	0211 = 211 A

4 - Number of phases

T	Three-phase power supply
---	--------------------------

5 - Rated voltage

4	380-480 V
---	-----------

6 - Internal dynamic braking²⁾

NB	Without internal dynamic braking IGBT
DB	With internal dynamic braking IGBT

7 - Protection degree

20	IP20 protection degree
----	------------------------

8 - RFI filter³⁾

Blank	Without internal RFI filter
C3	With internal RFI filter - category 3 ⁴⁾

9 - Special version**9.1 - Special hardware versions - Hxx**

Blank	With standard plug-in module
H00	Without plug-in module

9.2 - Special softwares versions - Sxx

Blank	Standard software
Sxx	Special software

10 - IHM version

Blank	Standard software
CH	IHM Chinese version

Notes: 1) Other configurations available upon request.

2) Braking resistor not included. Braking IGBT is available as standard for the whole CFW503 line, except for frame size A of IP20 version.

3) Conducted emission level (IEC 61800-3).

In order to minimize such problem, WEG variable speed drives contain common-mode capacitive filters, which are enough to avoid this type of interference in most cases.

If necessary, our inverters also have radio frequency (RFI) filters to reduce even more those high-frequency electromagnetic interference signals. Item 8 of the table above shows how to select the models of internal RFI filters for the CFW503.

Definitions of IEC/EN 61800-3 standard.

Categories:

Category C1: variable speed drives with voltage rating below 1,000 V and intended for application in the "First Environment".

Category C3: inverters with voltage ratings below 1,000 V developed for application in the "Second Environment" and not designed for application in the "First Environment".

Environments: First Environment: environments that include domestic installations, such as establishments directly connected without intermediate transformers to the low voltage power line, which supplies buildings used for domestic purposes.

Second environment: environments that include all the buildings other than those directly connected to the low voltage power line, which supplies buildings used for domestic purposes.

4) Under development.

Specification

CFW503 IP20 or NEMA1 - 380-480 V

CFW503 variable speed drive						Maximum applicable motor			
						Normal duty (ND)		Heavy duty (HD)	
Reference	Power supply (V)		Frame size	Rated current (A)		cv	kW	cv	kW
				HD	ND				
CFW503A01P0T4	Three-phase	380-480	A	1	1	0.25	0.18	0.25	0.18
CFW503A01P6T4				1.6	1.6	0.5	0.37	0.5	0.37
CFW503A02P6T4				2.6	2.6	1.5	1.1	1.5	1.1
CFW503A06P1T4				5	6.1	3	2.2	2	1.5
CFW503A08P2T4				7	8.2	5	3.7	3	2.2
CFW503B02P6T4			B	2.6	2.6	1.5	1.1	1.5	1.1
CFW503B04P3T4				4.3	4.3	2	1.5	2	1.5
CFW503B10P0T4				7	10	6	4.5	3	2.2
CFW503B14P0T4				10	14	7.5	5.6	6	4.5
CFW503C16P0T4			C	14	16	10	7.5	7.5	5.6
CFW503C18P0T4				16	18	10	7.5	10	7.5
CFW503D32P0T4			D	25	32	20	15	15	11
CFW503D37P1T4				32	37.1	25	18	20	15
CFW503E45P0T4			E	39	45	30	22	25	18.5
CFW503E58P5T4				49	58.5	40	30	30	22
CFW503F77P0T4			F	64	77	50	37	40	30
CFW503F88P0T4				73	88	60	45	50	37
CFW503F0105T4				88	105	75	55	60	45
CFW503G0142T4			G	115	142	100	75	75	55
CFW503G0180T4				142	180	120	90	100	75
CFW503G211T4				190	211	150	132	120	90



Specification

Optional items

These are hardware resources added to the CFW503 in the manufacturing process, and they should be requested via smart code.

Internal dynamic braking (IGBT)¹⁾

Used for quick stop of the motor with external¹⁾ braking resistor.

The braking IGBT is available as standard for the whole line, except for frame A of IP20 version.

Note: 1) External braking resistor not included. To specify the correct braking resistor, please refer to the CFW503 User's Manual.

Internal RFI filter


Inverters with internal RFI filter (code C2 or C3) when installed, maintained and used on the application they were designed for, and in compliance with the relevant installation standards and manufacturer's instructions, reduce conducted disturbance from the inverter to the main power supply in high frequency band (>150 kHz), complying to the relevant EMC standards, such as EN 61800-3 and EN 55011.

Conformal coating

The standard version of the CFW503 offers protection class 3C2 - according to IEC 60721-3-3, ensuring greater protection for applications in environments with corrosive chemicals.

It is possible to request an extra coating on the internal circuit boards, protection class 3C3 - according to IEC 60721-3-3, by adding EC to item 11.2 of the smart code, ensuring even greater protection for applications in harsh corrosive environment.

Note: in order to select the CFW503 without plug-in module (H00) and with extra coating on the internal circuit boards (HEC), H00EC must be filled in item 10 of the smart code.

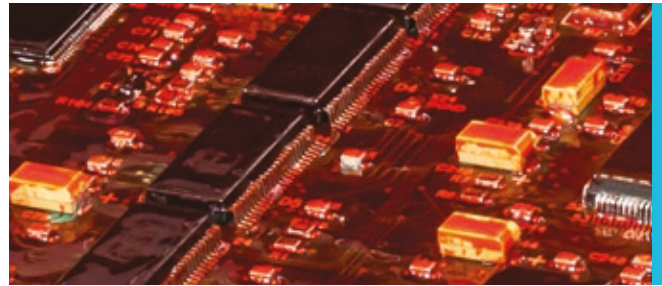

Accessories

Plug-in module

On the CFW503, it is possible leave to choose later the model of the internal plug-in module by entering H00 in item 10 of the smart code. In this case, it is necessary to select the plug-in module as an accessory, according to the table bellow.

In case H00 is not selected in item 10 of the smart code, the CFW503 will be supplied with the CFW500-IOS plug-in. You must always use one plug-in module per CFW503.

Reference	Description	Illustrative figures
Input and output (I/O) expansion		
CFW500-IOS ¹⁾	Standard plug-in module (included in the version with plug-in module)	
CFW500-IOD	Digital input and output (I/O) expansion plug-in module	
CFW500-IOAD	Digital and analog input and output (I/O) expansion plug-in module	
CFW500-IOR-B	Relay output expansion plug-in module	
Expansão de funcionalidades		
CFW500-ENC	Plug-in module with encoder input	
CFW500-CUSB	Plug-in module with USB port	
Communication on Fieldbus network		
CFW500-CCAN	CAN communication plug-in module (CANopen/DeviceNet)	
CFW500-CRS232	RS232 communication plug-in module	
CFW500-CRS485-B	RS485 communication plug-in module	
CFW500-CPDP	Profibus-DP communication plug-in module	
CFW500-CETH-IP	EtherNet/IP communication plug-in module	
CFW500-CEMB-TCP	Modbus-TCP communication plug-in module	
CFW500-CEPN-IO	PROFINET IO communication plug-in module	
Memory		
CFW500-MMF	Flash memory module	
Interfaces		
CFW500-HMIR	Remote operating interface (HMI)	
HMI-01	Alphanumeric HMI	
CFW503-RHMIF	Frame for remote HMI	
CFW500-CCHMIR1M	1-meter cable set for remote operating interface (HMI)	
CFW500-CCHMIR2M	2-meter cable set for remote operating interface (HMI)	
CFW500-CCHMIR3M	3-meter cable set for remote operating interface (HMI)	
CFW500-CCHMIR5M	5-meter cable set for remote operating interface (HMI)	
CFW500-CCHMIR75M	7.5-meter cable set for remote operating interface (HMI)	
CFW500-CCHMIR10M	10-meter cable set for remote operating interface (HMI)	
Description		
CFW500-KPCSA	Shielding kit for the power cables - size A (standard for option C2 and C3)	
CFW500-KPCSB	Shielding kit for the power cables - size B (standard for option C2 and C3)	
CFW500-KPCSC	Shielding kit for the power cables - size C (standard for option C2 and C3)	
CFW500-KPCSD	Shielding kit for the power cables - size D (standard for option C2 and C3)	
CFW500-KPCSE	Shielding kit for the power cables - size E (standard for option C2 and C3)	
CFW500-KPCSF	Shielding kit for the power cables - size F (standard for option C3)	
CFW500-KPCSG	Shielding kit for the power cables - size G (standard for option C3)	

Notes: 1) Accessory already included if the CFW503 version with the standard plug-in module is selected.
The plug-in modules can also be sold separately as an accessory item or spare part.

Accessories

Configuration of the plug-in modules¹⁾

Plug-in module	Functions																	
	Inputs		Outputs			STO/ SS1	USB port	Input for encoder ³⁾	Fieldbus networks							BACnet	Supply	
	Digital	Analog	Analog	Digital relay	Digital transistor				CANopen DeviceNet	RS232	RS485	Profibus-DP	EtherNet/IP	Modbus-TCP	PROFINET IO		10V	24V
CFW500-IOS	4	1	1	1	1	-	-	-	-	-	1	-	-	-	-	1	1	1
CFW500-IOD	8	1	1	1	4	-	-	-	-	-	1	-	-	-	-	-	1	1
CFW500-IOAD	6	3	2	1	3	-	-	-	-	-	1	-	-	-	-	-	1	1
CFW500-IOR	5 ²⁾	1	1	4	1	-	-	-	-	-	1	-	-	-	-	-	1	1
CFW500-ENC	5 ²⁾	1	1	4	1	-	-	1	-	-	1	-	-	-	-	-	1	1
CFW500-CUSB	4	1	1	1	1	-	1	-	-	-	1	-	-	-	-	-	1	1
CFW500-CCAN	2	1	1	1	1	-	-	-	1	-	1	-	-	-	-	-	1	-
CFW500-CRS232	2	1	1	1	1	-	-	-	-	1	1	-	-	-	-	-	-	1
CFW500-CRS485	4	2	1	2	1	-	-	-	-	-	2	-	-	-	-	1	1	1
CFW500-CPDP	2	1	1	1	1	-	-	-	-	-	1	1	-	-	-	-	-	1
CFW500-CETH-IP	2	1	1	1	1	-	-	-	-	-	1	-	1	-	-	-	-	1
CFW500-CEMB-TCP	2	1	1	1	1	-	-	-	-	-	1	-	-	1	-	-	-	1
CFW500-CEPN-IO	2	1	1	1	1	-	-	-	-	-	1	-	-	-	1	-	-	1

Notes: 1) All plug-in models have at least one RS485 port. The CFW500-CRS485 plug-in module has two RS485 ports.

The CFW503 allows the installation of one plug-in module per unit.

2) The digital input DI5 is always NPN, and it cannot be configured for PNP like the others.


3) Incremental encoder (A/A - B/B).

See the installation guides of the plug-in modules on the website www.weg.net.



Dimensions and weights

IP20 version

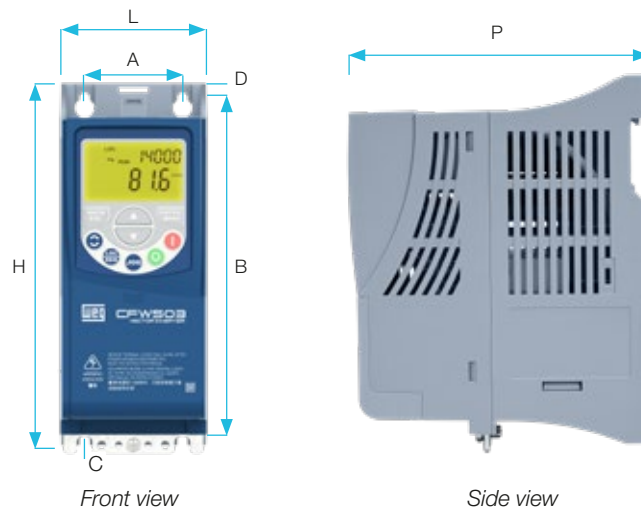

Size	A	B	C	D	H	L	P	Weight
	mm [in]	mm [in]	mm [in]	mm [in]	mm [in]	mm [in]	mm [in]	kg [lb]
A	50 [1.97]	175 [6.89]	11.9 [0.47]	7.2 [0.28]	189 [7.44]	75 [2.95]	150 [5.91]	0.8 [1.76]
B	75 [2.95]	185 [7.3]	11.8 [0.46]	7.3 [0.29]	199 [7.83]	100 [3.94]	160 [6.3]	1.2 [2.65]
C	100 [3.94]	195 [7.7]	16.7 [0.66]	5.8 [0.23]	210 [8.27]	135 [5.31]	165 [6.5]	2 [4.4]
D	125 [4.92]	290 [11.41]	27.5 [1.08]	10.2 [0.4]	306.6 [12.1]	180 [7.08]	166.5 [6.55]	4.3 [9.48]
E	150 [5.9]	330 [13]	34 [1.34]	10.6 [0.4]	350 [13.8]	220 [8.7]	191.5 [7.5]	10 [22.05]
F	200 [7.87]	525 [20.67]	42.5 [1.67]	15 [0.59]	550 [21.65]	300 [11.81]	254 [10]	26 [57.3]
G	200 [7.87]	650 [25.59]	57 [2.24]	15 [0.59]	675 [26.57]	335.3 [13.2]	314 [12.36]	52 [114.64]

Note: in frame sizes F and G, the inverter CFW503 can also be mounted in flange.

Standards

Standards	Safety standards	UL 508C - Power conversion equipment
		UL 840 - Insulation coordination including clearances and creepage distances for electrical equipment
		EN 61800-5-1 - Safety requirements electrical, thermal and energy
		EN 50178 - Electronic equipment for use in power installations
		EN 60204-1 - Safety of machinery. Electrical equipment of machines. Part 1: general requirements Note: In order to have a machine in accordance with this standard, the manufacturer of the machine is responsible for installing an emergency stop device and a device for disconnection from the power line
		EN 60146 (IEC 146) - Semiconductor converters
		EN 61800-2 - Adjustable speed electrical power drive systems - Part 2: general requirements - Rating specifications for low voltage adjustable frequency AC power drive systems
	Electromagnetic compatibility standards	EN 61800-3 - Adjustable speed electrical power drive systems - Part 3: EMC product standard including specific test methods
		EN 55011 - Limits and methods of measurement of radio disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment
		CISPR 11 - Industrial, scientific and medical (ISM) radio-frequency equipment - Electromagnetic disturbance characteristics - Limits and methods of measurement
		EN 61000-4-2 - Electromagnetic compatibility (EMC) - Part 4: testing and measurement techniques - Section 2: electrostatic discharge immunity test
		EN 61000-4-3 - Electromagnetic compatibility - Part 4: testing and measurement techniques - Section 3: radiated, radio-frequency, electromagnetic field immunity test
		EN 61000-4-4 - Electromagnetic compatibility - Part 4: testing and measurement techniques - Section 4: electrical fast transient/burst immunity test
		EN 61000-4-5 - Electromagnetic compatibility - Part 4: testing and measurement techniques - Section 5: surge immunity test
		EN 61000-4-6 - Electromagnetic compatibility - Part 4: testing and measurement techniques - Section 6: immunity to conducted disturbances, induced by radio-frequency fields
	Mechanical construction standards	EN 60529 - Degrees of protection provided by enclosures (IP code)
		UL 50 - Enclosures for electrical equipment
		IEC 60721-3-3 - Classification of environmental conditions - Part 3: classification of groups of environmental parameters and their severities - Section 3: stationary use at weather protected locations level 3M4

Technical specifications

Power rating	Power supply	Tolerance: -15 to +10%
		Frequency: 50/60 Hz (48 Hz to 62 Hz)
		Phase imbalance: ≤3% of the rated phase-phase input voltage
		Transient voltages and overvoltages according to Category III (EN 61010/UL 508C)
		Maximum of 10 (line) connections per hour (1 every 6 minutes)
Control	Method	Typical efficiency: ≥97%
		V/F (scalar)
		VVW: voltage vector control Vector without encoder (sensorless) and closed loop vector with encoder VVW PM vector control for permanent magnet motors
Performance	Output frequency	0 to 500 Hz, resolution of 0.015 Hz
	V/F Control	Speed regulation: 1% of the rated speed (with slip compensation) Speed variation range: 1:20
	Vector control (VVW)	Speed regulation: 1% of the rated speed Speed variation range: 1:30
	Sensorless	Speed regulation: 0.5% of the rated speed Speed variation range: 1:100
	Vector control with Encoder	Speed regulation: 0.1% of the rated speed Speed variation range: 1:100
	PM VVW Control ⁴⁾	Regulation: 0.1 % of the rated speed Speed variation range: 1:20
Environment conditions	Temperature around the CFW503	-10 °C to 40 °C Inverters for mechanics A to G: for temperatures surrounding the inverter higher than the specifications, it is necessary to apply of 2 % of current derating for each Celsius degree, limited to an increase of 10 °C (50 °F).
	Aggressive environments	Protection Class 3C2 - Standard coating on the internal circuits, according to IEC 60721-3-3 (standard model)
	Air relative humidity	Protection Class 3C3 - Extra coating - optional, according to IEC 60721-3-3 (optional)
	Altitude	5% to 95% non-condensing
	Pollution degree	Up to 1,000 m (maximum altitude under normal conditions) 1,000 to 4,000 m: current derating of 1% for each 100 m above 1,000 m of altitude
Inputs ¹⁾	Analog	2 (EN 50178 and UL 508C), with non-conductive pollution Condensation must not cause conduction of the accumulated residues
	Digital	1 isolated input. Levels: (0 to 10) V or (0 to 20) mA or (4 to 20) mA Linearity error ≤0.25% Impedance: 100 kΩ for voltage input, 500 Ω for current input Programmable functions, including PTC input Maximum voltage accepted in the inputs: 30 V _{oc}
Outputs ¹⁾	Analog	4 isolated inputs Programmable functions: Active high (PNP): maximum low level of 15 V _{oc} ; minimum high level of 20 V _{oc} Active low (NPN): maximum low level of 5 V _{oc} ; minimum high level of 9 V _{oc} Maximum input voltage of 30 V _{oc} Input current: 4.5 mA Maximum input current: 5.5 mA
	Relay	1 isolated output. Levels (0 to 10) V or (0 to 20) mA or (4 to 20) mA Linearity error ≤0.25% Programmable functions RL ≥10 kΩ (0 to 10 V) or RL ≤500 Ω (0 to 20 mA / 4 to 20 mA)
	Transistor	1 relay with NO/NC contact Maximum voltage: 240 V _{ac} Maximum current of 0.5 A Programmable functions
	Power supply	1 isolated open sink digital output (using as reference the 24 V _{oc} power supply) Maximum current of 150 mA (maximum capacity of the 24 V _{oc} power supply) ²⁾ Programmable functions
Communication	Selectable plug-in	24 V _{oc} power supply Maximum capacity: 150 mA ²⁾ Power supply of 10 V _{oc} Maximum capacity: 2 mA
Safety	Protection	Fieldbus: Modbus-RTU, CANopen, DeviceNet, Profibus-DP, EtherNet/IP, Modbus-TCP, PROFINET IO, BACnet, SybilNet USB, RS485 and RS232 ports
Operating interface (HMI)	Standard (built in the CFW503)	Phase-phase overcurrent/short circuit in the output Phase-ground overcurrent/short circuit in the output Undervoltage/overvoltage in the power Overtemperature of the heatsink Motor overload Overload on the power module (IGBTs) External fault / alarm Programming error
Protection degree	IP20	9 keys: Run/Stop, Increment, Decrement, Direction of rotation, Jog, Local/Remote, Back/Esc and Enter/Menu LCD Display It allows accessing/changing all the parameters Accuracy of the indications: Current: 5% of the rated current Speed resolution: 0.1 Hz
	NEMA1/IP20	Sizes A, B, C, D, E, F and G
	IP66	Sizes A, B, C, D, E, F and G with NEMA1 kit
		Sizes A and B (from 1.0 A to 31 A)


Notes: 1) The number and/or types of analog/digital inputs/outputs may vary according to the plug-in module (accessory) used. In the table above, the standard plug-in module (CFW500-IOS) was taken into account. For further information, refer to the CFW503 user manual.

2) The maximum capacity of 150 mA considers the load of the 24 V power supply plus the transistor output, that is, the sum of the consumption of both must not exceed 150 mA.

3) Designed for exclusive industrial or professional use.

4) The VVW PM function is available for all inverters with firmware version V2.2x or higher, except for size A models in IP20.

Block diagram of IP20

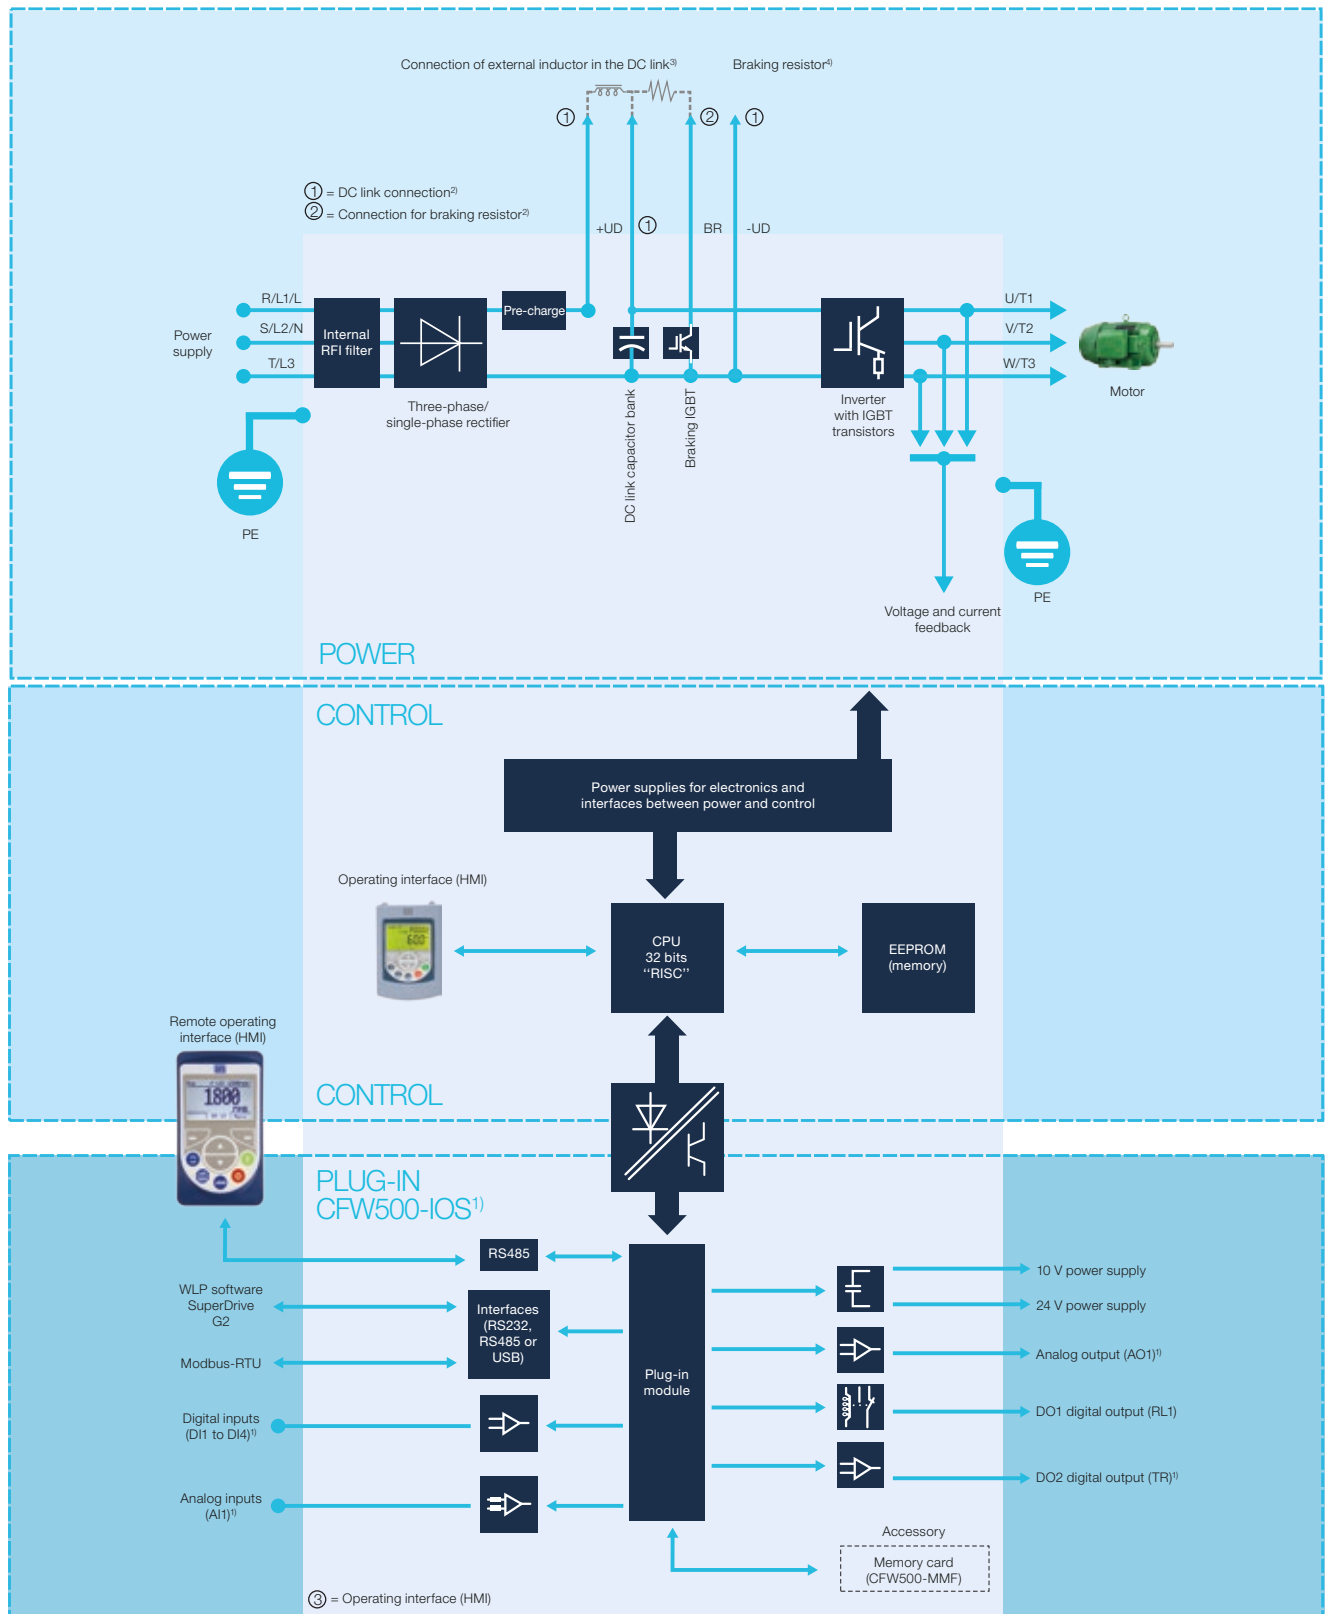

[illegible]

[illegible]



Global presence

is essential, as much
as understanding
your needs.

Global Presence

With more than 40,000 employees worldwide, WEG is one of the largest electric motors, electronic equipments and systems manufacturers. We are constantly expanding our portfolio of products and services with expertise and market knowledge. We create integrated and customized solutions ranging from innovative products to complete after-sales service.

WEG's know-how guarantees our **CFW503 - Variable Speed Drive** is the right choice for your application and business, assuring safety, efficiency and reliability.





Availability is to have a global support network



Partnership is to create solutions that suits your needs



Competitive edge is to unite technology and innovation

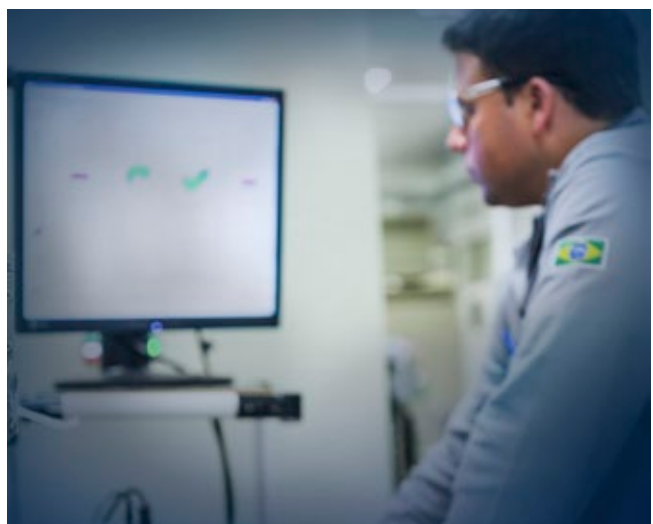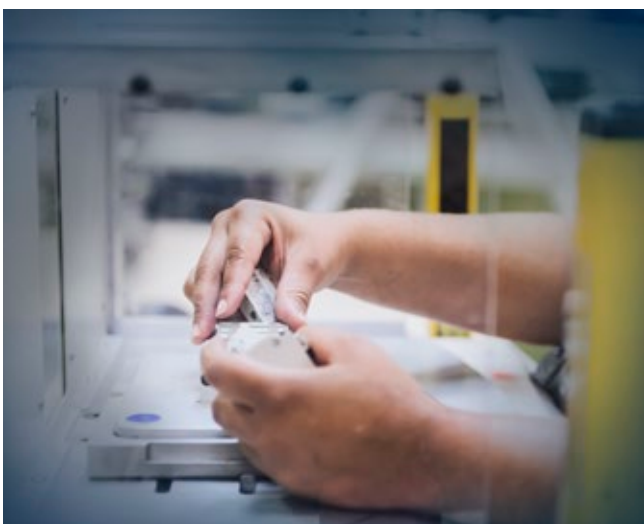

Know More

High performance and reliable products to improve your production process.



Excellence is to provide a whole solution in industrial automation that improves our customers productivity.

Visit: www.weg.net

 youtube.com/wegvideos

The scope of WEG Group solutions
is not limited to products and solutions
presented in this catalogue.

To see our portfolio, contact us.

**For WEG's worldwide
operations visit our website**



www.weg.net



+55 47 3276.4000



automacao@weg.net



Jaraguá do Sul - SC - Brazil

Cod: 50136310 | Rev: 01 | Date (m/y): 03/2024.

The values shown are subject to change without prior notice.
The information contained is reference values.